




The Tournus assets



Noiseless sliding :
polyamide rollers on ball bearings,
Rilsan-coated door guide.




Easy installation:
rear recess of 120 mm allowing for
clearance for pipes and grooved
plinths.

Comfort :
sound absorbent worktop




Sturdiness :
lined, sliding doors made rigid
by a reverse fold acting as
handle.

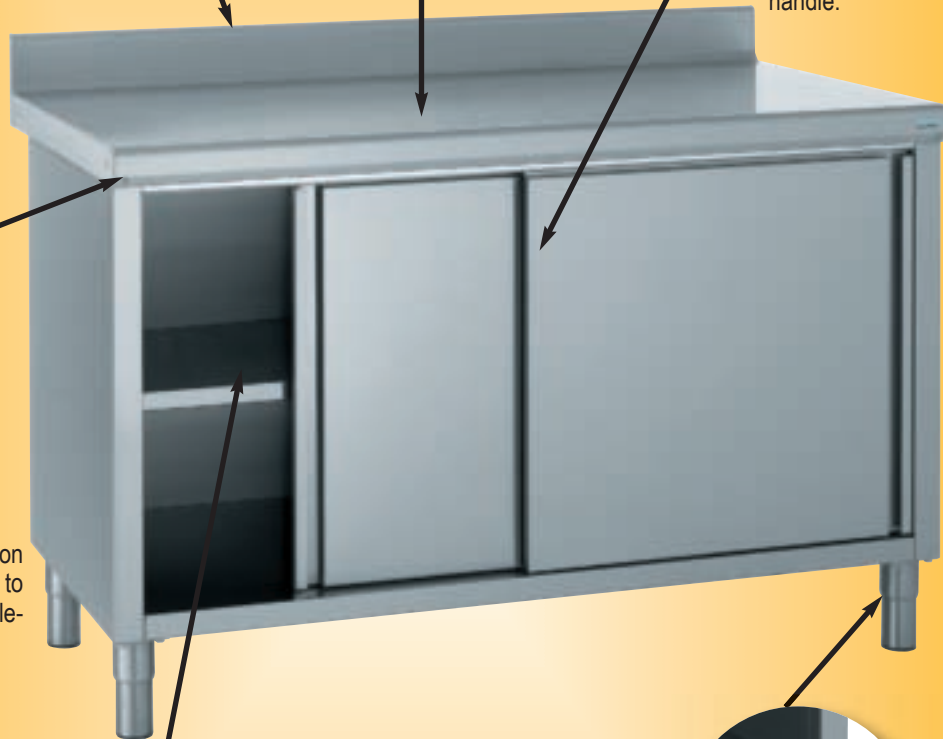

Eye-catching :
rounded front edge like on
the tables and bowl sinks to
match the surrounding ele-
ments.



Safety :
height adjustable shelves with
flattened, cut-proof edge.



Easy levelling :
adjustable legs Ø 60 mm for
50 mm adjustment.

All these features ensure compliance with the most stringent requirements in terms of STURDINESS, HYGIENE and SAFETY and an extensive range.

